NOTES

KERB DETAILS SHOWN INDICATIVE ONLY. DETAILED DESIGN BY OTHERS

X No. REQUIRED

GLASS SPEC:

OUTER: 33mm CLEAR TOUGHENED AND LAMINATED GLASS -

10/1.5/10/1.5/10 - PVB OR SGP INTERLAYER

CAVITY: 20mm ARGON FILLED + WARM EDGE SPACER + DC3363 UV

RESISTANT SILICONE BOND

INNER: 6mm CLEAR HST TOUGHENED GLASS OR 13.5mm LAMINATED + LOW E TO CAVITY FACE

- LIGHT TRANSMISSION = 73.2%
- SOLAR GAIN = 46.8 g
- CENTRE PANE U-VALUE = 1.1 W/m^2 .K
- ACOUSTIC REDUCTION = NPD
- AIR PERMEABILITY = CWCT CLASS A4
- WEATHER RESTIANCE = CWCT CLASS A7
- WIND RESISTANCE = CWCT CLASS E2400
- WEIGHT = SIZE DEPENDANT.
- DOWSIL 3363 UV RESISTANT SILICONE EDGE SEALS TO IGU
- DOWSIL 791 UV RESISTANT EDGE SEALS TO FRAME
- AA FIRE-RATED: AA DESIGNATION (NATIONAL CLASS) OR bROOF (T4) EUROPEAN CLASS AND EURO CLASS A1 NON-COMBUSTIBLE

ROOFLIGHT ORDER SIZE = OVERALL FINISHED AND WEATHER KERB DIMS.

GLASS BONDED TO FRAME WITH GLAZING SECURITY TAPE - TN136.

KERB DETAILS SHOWN INDICATIVE DETAILED DESIGN BY OTHERS.

RECOMMENDED FALL SHOWN TO HELP SHED WATER ONLY. UNIT CAN BE INSTALLED AT LOWER PITCHES. HIGHER IF NO WATER AT ALL IS DESIRED.

PRODUCT U-VALUE = U-Values are size dependant CENTRE PANE U VALUE = AS LOW AS 1.0W/M².K TO SPECIAL ORDER.

THE MHOR 1992 SET OUT A CLEAR RANKING OF MEASURES FOR DEALING WITH RISKS FROM MANUAL HANDLING

ROOFLIGHTS MUST ONLY BE INSTALLED BY COMPETENT CONTRACTORS. DANGER OF DAMAGING GLASS IF IT IS WALKED UPON. GLASS CLASSED AS NON-FRAGILE SHOULD NOT BE WALKED

REFER TO RISK ASSESSMENT FOR FURTHER DETAILS. FALL FROM HEIGHTS DURING INSTALLATION.

THERMALLY

THERMALLY

BROKEN FRAME

BROKEN FRAME

150 MIN

FLOOR LOADINGS TO BS EN 1991-1-1:

- 1.5 kN/m² Uniformly distributed load
- 2.0 kN Concentrated load
- 4.0 kN/m² Uniformly distributed load
- 3.6 kN Concentrated load
- 5.0 kN/m² Uniformly distributed load
- 4.5 kN Concentrated load

DETAILS.

THESE LOADS ARE ARBITRARY. GLASS THICKNESS MAY VARY DEPENDING ON LOADS. LOADS TO BE AGREED/ SPECIFIED BY CLIENT.

PAINTED BORDER SHOWN AS STANDARD TO COVER GLAZING FRAME.

DIMENSIONS SHOWN DOWN THE SLOPE.

DIMENSIONS SHOWN TO TOP OF GLASS ARE APPROXIMATE.

SEALING TO SURROUNDING CONSTRUCTION BY OTHERS.

THE MANUFACTURER RECOMMENDS AN ANTI-SLIP COATING TO WALK ON GLASS. DATA SHEET AVAILABLE FROM:

HTTPS://WWW.ROOFGLAZE.CO.UK/RESOURCES/TECHNICAL-DATA-SHEETS/


SOLAR CONTROL AVAILABLE VIA SAFLEX INTERLAYER. CONTACT US FOR


24V FOLDING ARM MOTORS. TRANSFORMER WALL PANEL. BATTERY BACKUP OPTIONAL. ALL ELECTRICAL COMMISSIONING BY OTHERS. OTHER SWITCH OR CONTROL OPTIONS, SUCH AS REMOTE OPERATION, OVERRIDE SWITCH, AVAILABLE UPON REQUEST.


BORDER SHOWN TO COVER TOP FRAME ONLY. OTHER SIZES AVAILABLE **UPON REQUEST.**




TRANSFORMER CONTROL PANEL

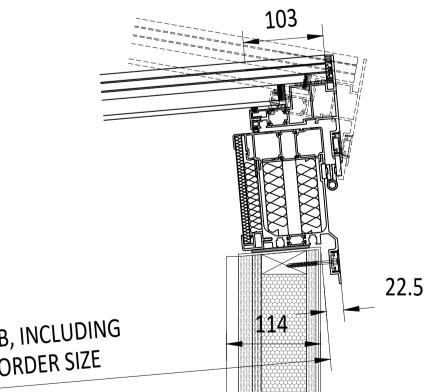

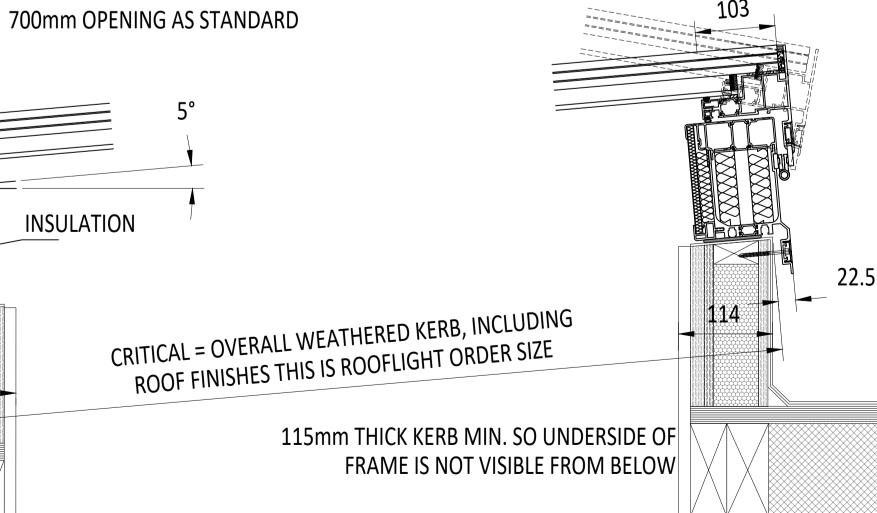

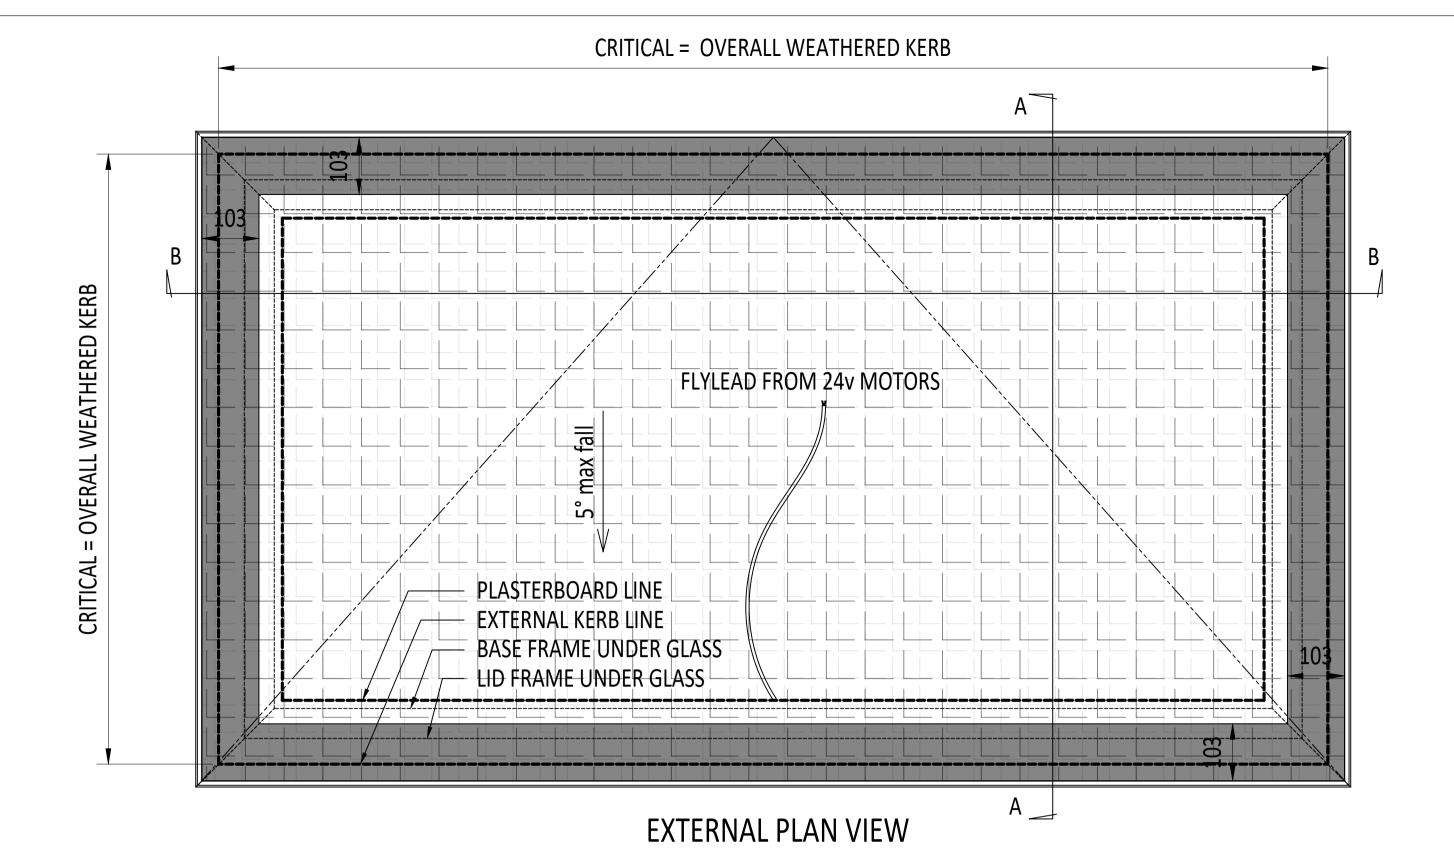

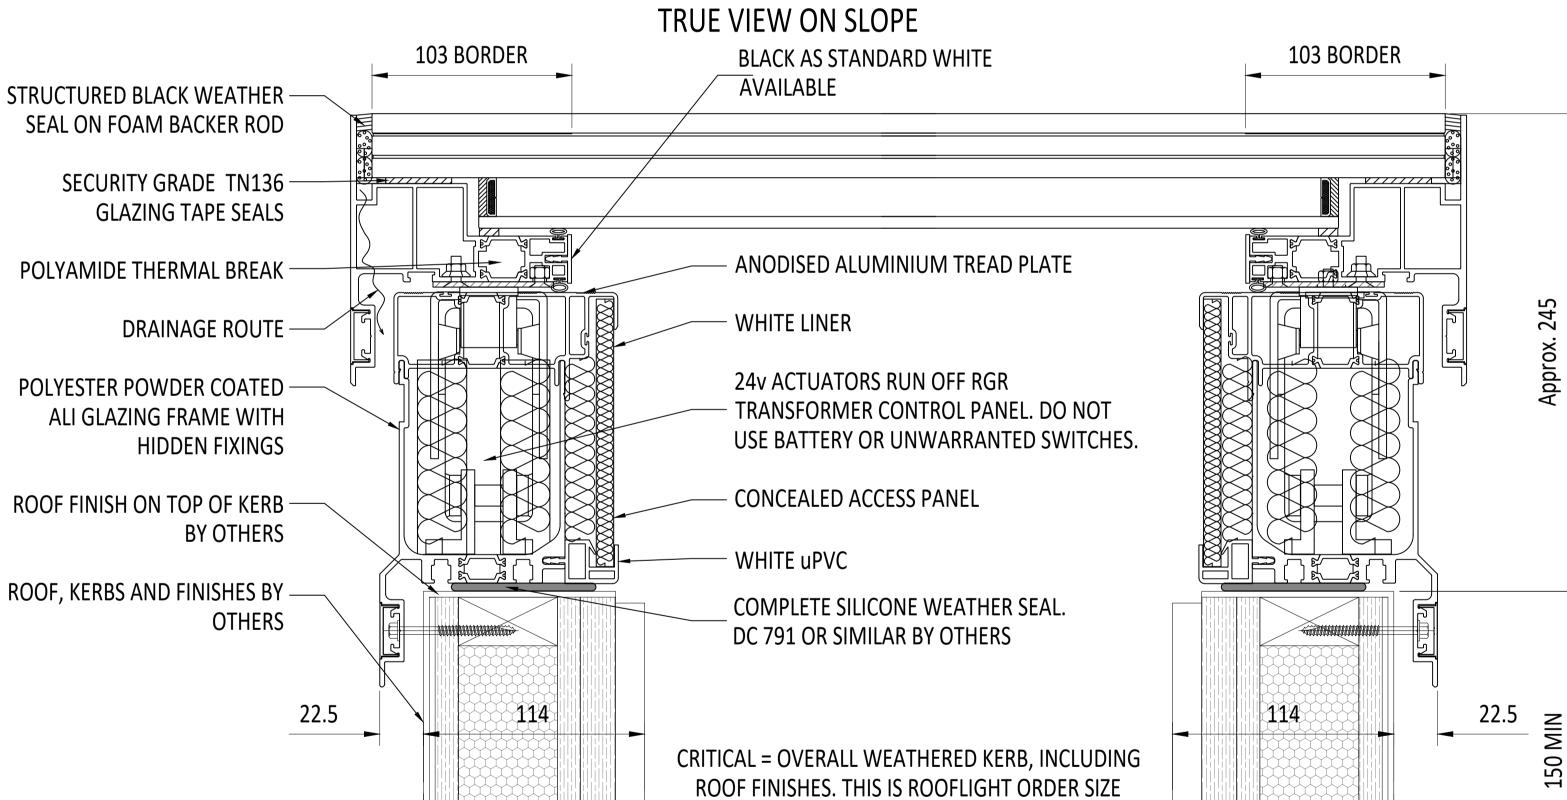

IF IN DOUBT ASK DO NOT SCALE

LUSTRATION PURPOSES ONLY.

The manufacturer would advise an installation with a THIS DRAWING MUST KERB DESIGNER TO ENSURE THE minimum pitch of 3 for roomight dates to the pooling. Whilst the product can be installed flat without detriment to the warrantee, the manufacturer cannot be PASSED TO A THIRD the surface of the rooflight, post installation, if installed without an adequate fall. larger units may require a reater fall. The final decision on amount of fall required must be made by the client and relaved to the installer.

CHECKED D.PUGH

TOLERANCE UNLESS OTHERWISE STATED DIMENSIONS IN

ALUMINIUM + GLASS

FINISH MARINE GRADE POLYESTER POWDER COAT OPTIONS: RAL 7016 ANTHRACITE GREY, RAL 9005 BLACK, 30% GLOSS (T.B.C)

REV AMENDMENTS

Roofglaze Rooflights Ltd, 1 Howard Road, Eaton Socon, St Neots, Cambs, PE19 8ET Telephone 01480 474797

SECTION B-B

RGR-HV-23-375



ROOFLIGHT. KERBS SHOWN ON

INSULATION

ninimum pitch of 5° for rooflight units to minimize water held responsible for any excessive pooling of water to PARTY WITHOUT

SECTION A-A

07-02-2022 MANUFACTURER. DATE 07-02-2022

1:2,1:5,1:7 @ A1

SKYWAY 24v WALK ON FOR VENTILATION KERBS BY OTHERS SIGNED CHECKED DATE